



STD-SD-32K

STD-SD-31K/V


PRODUCT INFO

Three basic models:
STD-SD-32K - a simple Emergency Shower with overhead spray and optional body spray.
STD-SD-31K - a simple Decontamination Shower with a multi-nozzle spray system.
STD-SD-31K/V a two stage Decontamination Unit incorporating a detergent inducer.

OPTIONAL FITTINGS

- Body Spray (32K only)
- Eye/Facewash **STD-45G**
- Optiflex Hand Shower
- Panel Foot Control (not 31K/V)
- Strip Screens
- Shower Door
- Light
- Proximity Switches
- Brush on hose (31K/V only)

STD-SD-31K

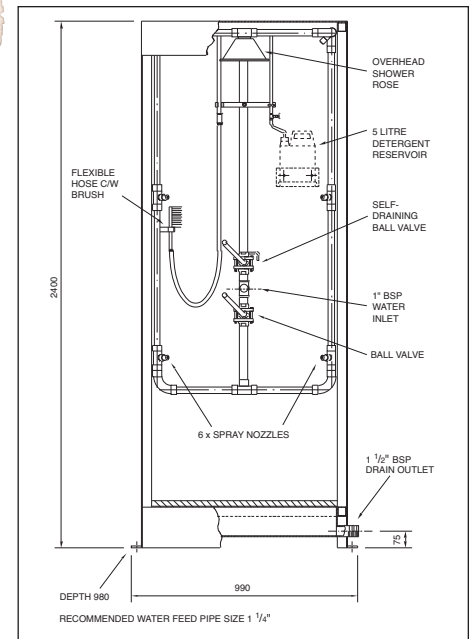

cubicle showers

These cubicle models are ideal in situations where a shower needs to be totally enclosed, particularly if space is at a premium or where a shower requires its own designated area due to clutter. Also very popular where it is imperative that there is no overspray of water outside the shower area.

Galvanised	Stainless Steel	Depth mm	Width mm	Height mm	Weight kg	Inlet Size (" inches) BSP	Outlet Size (" inches) BSP	Min. Pressure kg/cm ² (bar g)	Water Flow l/min
PPE Decontamination Showers									
DEC-V-5	DEC-V-5S	1110	1300	2400	160	1 1/2"	-	4	250
DEC-D-29	DEC-D-29S	1110	1300	2400	150	1 1/4"	-	4	250
-	DEC-V-1	920	900	1540	20	3/4"	-	2.8	60
-	DEC-V-2	920	900	1540	20	3/4"	-	2.8	60
DEC-V-3	-	920	900	1540	20	3/4"	-	2.8	60
Cubicle Showers									
STD-SD-32K		980	900	2400	150	1"	1 1/2"	2	75
STD-SD-31K		980	900	2400	150	1"	1 1/2"	2	126
STD-SD-31K/V		980	900	2400	150	1"	1 1/2"	2	126