




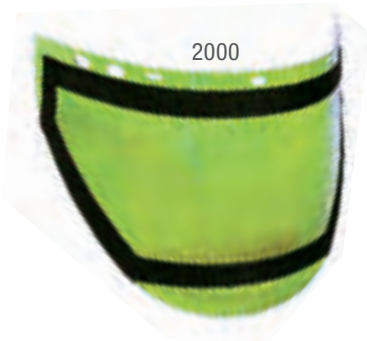


UPGRADE YOUR PRO-HOOD® LENS: IF YOUR FH31RB, FH40GY, OR FH55GY LENS HAS MODEL # IM22-ARCAF6FL-2, YOU SHOULD UPGRADE TODAY TO THE 4000 CLEARER LENS FOR GREATER VISIBILITY.

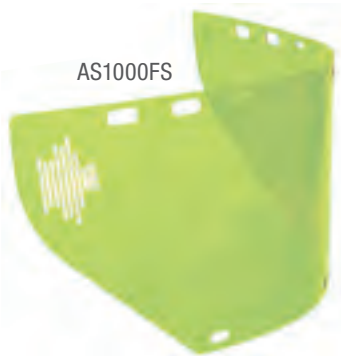

4000 & 10000PC
Dual Lens

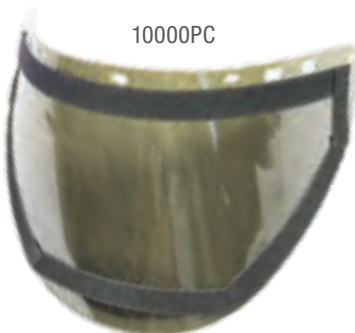

AS1000/AS1200/AS1500 & PRO-HOOD®

- 8 cal/cm² to 100 cal/cm² ATPV ratings
- 7.5" x 20" Viewing area for replacement AS1000 protective shield lenses
- 10" x 20" Viewing area for replacement PRO-HOOD® lenses
- 4000V and 10000V lenses have two layers of protection
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and tested to ASTM F2178 specifications

AFLENSU - The universal inner lens is a field installed anti-fog lens for PRO-HOOD® arc flash protective switching hoods. Installs quickly without tools to the inside of the PRO-HOOD® face shield and can be removed for cleaning or replacement.

CAT. NO.	DESCRIPTION
AS1000FS	Replacement face shield for AS1000HAT, AS1000FB and AS1000U. Used with the ASSLB, FB BRACKET, or BRACKET brackets and ASCP.
AS1200FS	Replacement window for AS1200HAT, 12 cal/cm ² .
AS1200FS-FB	Replacement face shield/window 12 cal/cm ² for AS1200FB full brim
AFLENSU	Inner Anti-Fog Lens for PRO-HOOD®.
2000	Replacement lens, with hook & pile attachment, for OLDER DESIGN 8 cal/cm ² to 20 cal/cm ² PRO-HOOD®. Single layer lens. Used with the ASSLB, FB BRACKET, or BRACKET brackets.
4000	Replacement lens, with hook & pile attachment, for 31 cal/cm ² to 40 cal/cm ² PRO-HOOD®. Dual layer lens. Used with the ASSLB, FB BRACKET, or BRACKET brackets.
10000PC	Replacement lens, with hook & pile attachment, for 75 cal/cm ² to 100 cal/cm ² PRO-HOOD®. Dual layer lens (clear and tinted). Used with the ASSLB, FB BRACKET, or BRACKET brackets.