

showers




STD-MH-15K

Premium Emergency Safety Shower with additional Body Spray, immersion heated and pre-insulated. Available in Galvanised or Stainless Steel.

Trace Tape heated model - **STD-H-15K**

OPTIONAL FITTINGS:

- Foot Panel
- Zone 1 & 2 Light
- Proximity Switch
- Heated Underground Extension Pipe
- Cubicle

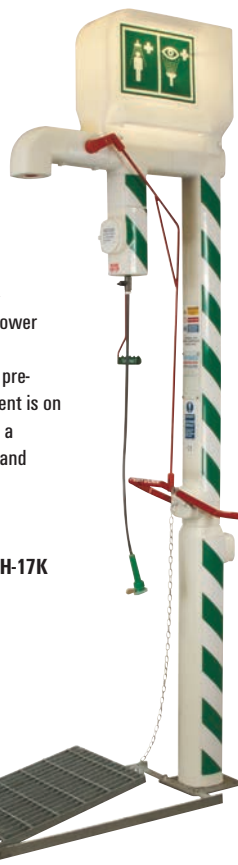

STD-MH-17K

Premium Emergency Safety Shower with additional Body Spray and Eyebath, immersion heated and pre-insulated. The Eyebath attachment is on a flexible hose and incorporates a handle, removable eyebath cup and dust cover.

Available in Galvanised or Stainless Steel.

Trace Tape heated model - **STD-H-17K**

OPTIONAL FITTINGS:

- Foot Panel
- Zone 1 & 2 Light
- Proximity Switches
- Heated Underground Extension Pipe
- Cubicle



STD-MH-15K/11K

Premium Emergency Safety Shower with additional Body Spray, immersion heated and pre-insulated. With Eyebath/Facewash Fountain and additional eyebath diffuser on flexible hose to treat unconscious or disabled personnel. Available in Galvanised or Stainless Steel.

Trace Tape heated model - **STD-H-15K/11K**

OPTIONAL FITTINGS:

- Foot Panel
- Foot Treadle
- Zone 1 & 2 Light
- Proximity Switches
- Heated Underground Extension Pipe
- Protective Frame

PRODUCT INFO

- Rotationally moulded unbreakable white polyethylene outer casing
- Integral Light Box
- Self-draining removable spray nozzles free from build-up of bacteria
- Heated versions for use in cold climates.
- Insulated versions for use in hot climates.
- Robust construction
- Wall mounted models
- Free standing models

TECHNICAL DETAILS

- Modular design
- Easy maintenance

CHOICES

- Available in Galvanised or Stainless Steel

Galvanised	Stainless Steel	Depth mm	Width mm	Height mm	Weight kg	Inlet Size (" inches) BSP	Min. Pressure kg/cm ² (bar g)	Water Flow l/min
Premium Heated Emergency Showers								
STD-H-1K	STD-H-1KS	975	255	910	25	1"	1.5	75
STD-H-2K	STD-H-2KS	975	255	590	20	1"	1.5	75
STD-MH-5K	STD-MH-5KS	835	325	2705	60	1 1/4"	1.5	75
STD-H-5K	STD-H-5KS	835	325	2705	60	1 1/4"	1.5	75
STD-MH-6K	STD-MH-6KS	835	325	2705	70	1 1/4"	1.5	75
STD-H-6K	STD-H-6KS	835	325	2705	70	1 1/4"	1.5	75
STD-MH-5K/11K	STD-MH-5KS/11KS	855	480	2705	55	1 1/4"	2.2	75
STD-H-5K/11K	STD-H-5KS/11KS	855	480	2705	55	1 1/4"	2.2	75
STD-MH-15K	STD-MH-15KS	890	460	2705	90	1 1/2"	1.8	115
STD-H-15K	STD-H-15KS	890	460	2705	90	1 1/2"	1.8	115
STD-MH-17K	STD-MH-17KS	890	460	2705	95	1 1/2"	1.8	115
STD-H-17K	STD-H-17KS	890	460	2705	95	1 1/2"	1.8	115
STD-MH-15K/11K	STD-MH-15KS/11KS	1315	480	2705	106	1 1/2"	2.2	115
STD-H-15K/11K	STD-H-15KS/11KS	1315	480	2705	106	1 1/2"	2.2	115

Note: All above models available with insulation only (no heating) STD-J-(model No.)